



GO 12/ 24/ 24TC/ 33/ 33TC



Cost-Effective Laminator

Pouch Laminator for Office and Home Use

Carrier-Needed Operation

Hot & Cold Lamination



GO 12/ 24/ 24TC/ 33/ 33TC

- ◆ Cost Effective Laminator
- ◆ Easy to Use
- ◆ Choice of Machine Sizes ID Card, A4,A3
- ◆ Temperature Control(GQ-24TC, 33TC)



ISO 9001:2000 CERTIFICATE




CERTIFICATE NUMBER: RM0857

GQ 12/ 24/ 24TC/ 33/ 33TC

Pouch Laminator



The versatile GQ laminators enable you to achieve professional results every time whatever the application is. In schools and colleges, offices, shops and restaurants, at home in fact anywhere, GQ laminators produce perfect, trouble-free results.

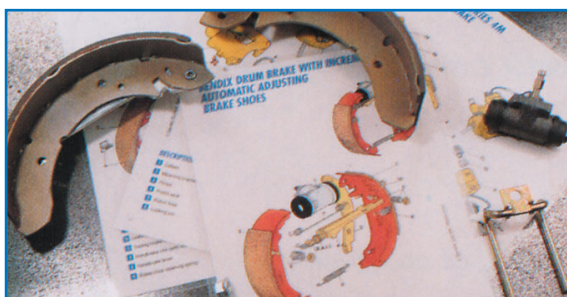

- Carrier-needed operation
- Ideal for all standard laminating applications
- Laminated documents are resistant to chemicals, oil and grease
- Water-proof and temper-proof results every time

Specifications

| Model Name | GQ-12 | GQ-24 | GQ-24TC | GQ-33 | GQ-33TC |
|-------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Laminating Speed | 260mm/min | 360mm/min | 360mm/min | 360mm/min | 360mm/min |
| Laminating Width | 120mm | 240mm | 240mm | 330mm | 330mm |
| Laminating Films | 75mic~125mic | 75mic~125mic | 75mic~125mic | 75mic~125mic | 75mic~125mic |
| Thickness of substrate(Paper) | 80g/㎡~250g/㎡ | 80g/㎡~250g/㎡ | 80g/㎡~250g/㎡ | 80g/㎡~250g/㎡ | 80g/㎡~250g/㎡ |
| Power Requirements | 220~240V, 50/60Hz | 220~240V, 50/60Hz | 220~240V, 50/60Hz | 220~240V, 50/60Hz | 220~240V, 50/60Hz |
| Power Consumption | 122W, 0.5A | 320W, 1.4A | 320W, 1.4A | 400W, 1.8A | 400W, 1.8A |
| Warm Up Time | 2 minutes | 2 minutes | 2 minutes | 2 minutes | 2 minutes |
| Heating System | Heat Plate (Mica Heater) | Heat Plate (Mica Heater) | Heat Plate (Mica Heater) | Heat Plate (Mica Heater) | Heat Plate (Mica Heater) |
| Operating Temperature | 150℃ Max. | 150℃ Max. | 150℃ Max. | 150℃ Max. | 150℃ Max. |
| Speed Control | Fixed | Fixed | Fixed | Fixed | Fixed |
| Temperature Control | None | None | Yes | None | Yes |
| Dimensions(WxLxH) | 235 x 120 x 77mm | 385 x 140 x 89mm | 385 x 140 x 89mm | 485 x 140 x 89mm | 485 x 140 x 89mm |
| Type of Main Motor | Synchronous Motor-S | Synchronous Motor-S | Synchronous Motor-S | Synchronous Motor-S | Synchronous Motor-S |

Copyright GMP 2004. All rights reserved. Reproduction by any means of any image in this catalogue is prohibited without the prior consent of GMP and its authorized agent

GMP reserves the right to after change specifications without prior notice.

*Chromonex®: PP and PET composite Film

*Phonex® : Heat Seal Laminating utilizing PVC material Film

*Polynex® : Heat Seal Laminating utilizing OPP material Film

*Micronex® : Heat Seal Laminating utilizing ultra thin dry overcoating Film